



Ratings Help Sheet

Series 3000-T Sliding Glass Door

Specifications:

AAMA/WDMA/CSA/IS101/A440-08 / CSA A440S1-09 (Non-Impact)
TAS 201-94,202-94,203-94 ([FL-15560](#)) (HVHZ)
ASTM 1886e/1996e ([FL-15560](#)) Impact Non-HVHZ)

Frame:

Performance Chart

<u>Configuration</u>	<u>DP (psf)</u>	<u>Air (psf)</u>	<u>Water (lbs/psf)</u>	<u>FL#</u>
OOX (240x120)	+35/-35	1.57	6.0 lbs 2" sill / 8.25 lbs 3" sill	FL-15560.11
OXO (180x120)	+40/-50	1.57	6.0 lbs 2" sill / 8.25 lbs 3" sill	FL-15560.12
OXXO (180x120)	+40/-50	1.57	6.0 lbs 2" sill / 8.25 lbs 3" sill	FL-15560.13

Interlockers:

- HP

Meeting Stile:

- HP Adaptor

Latch:

- Archetype / Archetype Narrow

Glazing Options:

HVHZ / Impact Non-HVHZ:

1" IG: 6mm-t/space/(4mm/.090SGP/4mm-) (1 1/16" OA)(**G1**)

9/16": 6mm/.090SGP/6mm-R (**G2**)


Non-Impact:

1" IG: 6mm-T/space/6mm-T

Series 3000-T Sliding Glass Door


Sample Illustration:

OOX

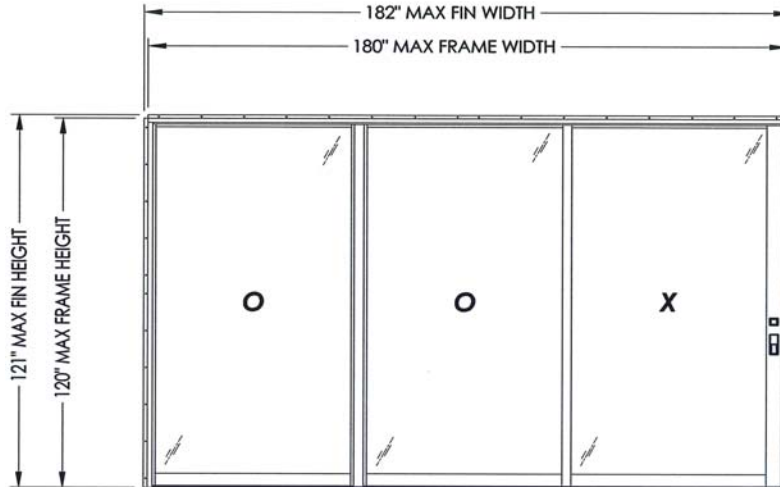

MAX PANEL DIMENSION	OVERALL D.L.O. DIMENSION	GLASS TYPE	DESIGN PRESSURE (PSF)	
			POSITIVE	NEGATIVE
62.0" X 118.25"	55.0" X 112.75"	G1, G2	+35.0	-35.0


OXO

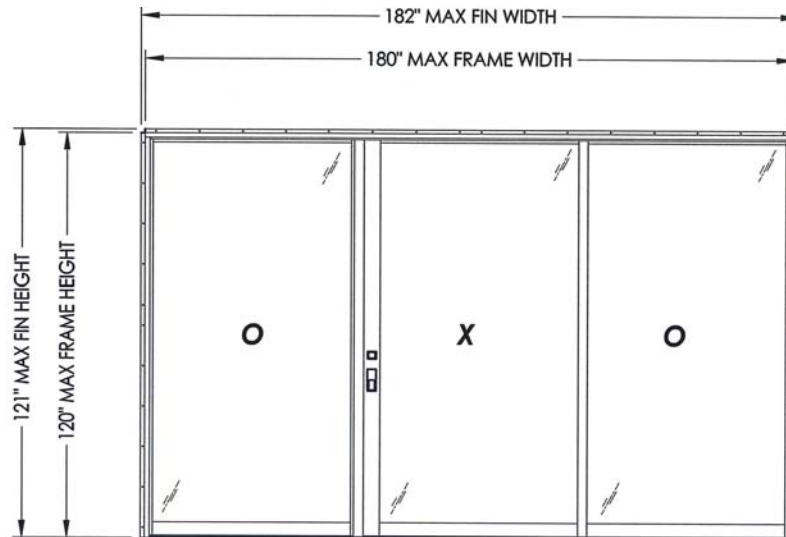

MAX PANEL DIMENSION	OVERALL D.L.O. DIMENSION	GLASS TYPE	DESIGN PRESSURE (PSF)	
			POSITIVE	NEGATIVE
62.0" X 118.25"	55.0" X 112.75"	G1, G2	+40.0	-50.0
			+50.0*	-50.0

Series 3000-T Sliding Glass Door

OXXO

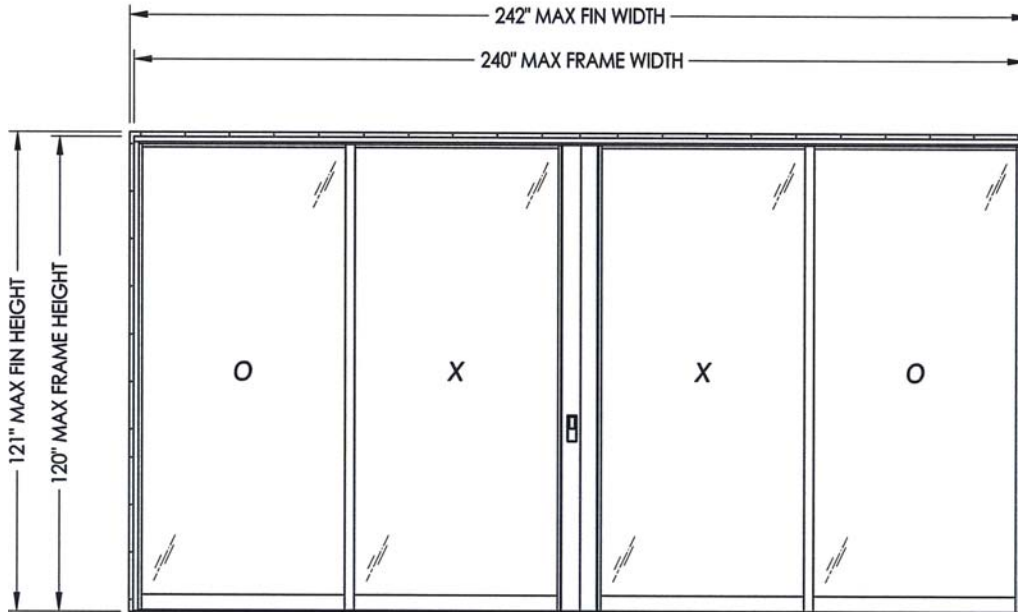

MAX PANEL DIMENSION	OVERALL D.L.O. DIMENSION	GLASS TYPE	DESIGN PRESSURE (PSF)	
			POSITIVE	NEGATIVE
62.0" X 118.25"	54.75" X 112.75"	G1, G2	+40.0	-50.0
			+50.0*	-50.0

*Requires 3" sill pan.