


SERIES 3600






LUXURY HOME FOLDING DOOR



TYPICAL CONFIGURATIONS	← MAX PANEL WIDTH	↑ MAX PANEL HEIGHT	☀ BEST SHGC	⚙ BEST U-FACTOR
• 1L2R, 3L2R, 4L1R.	39"	120"	0.16	0.59

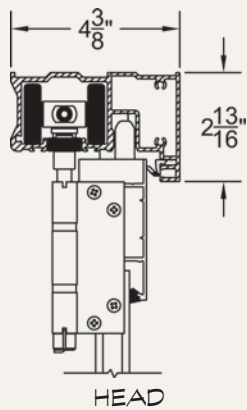

ELEVATION VIEW:
1L3R CONFIGURATION

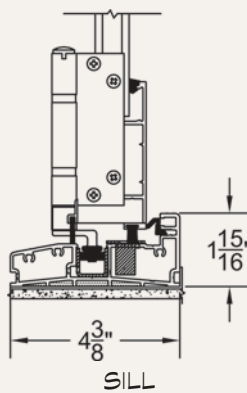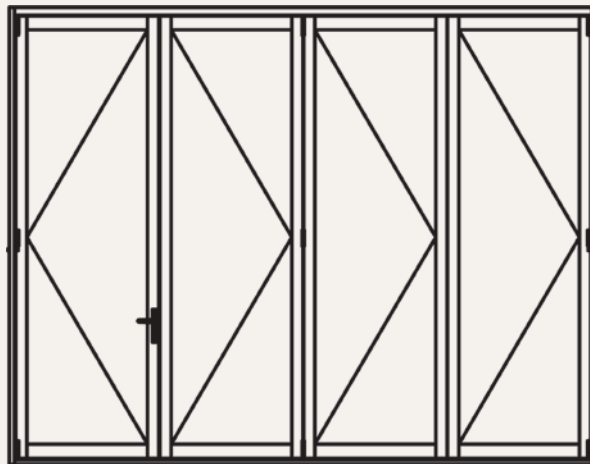



DESIGN NOTES

- Up to 10' tall.
- Optional in-line hinged door.
- Maximizes opening when pocket doors are not an option.



Three Threshold Choices:

Depending on the application, we offer three different choices ranging from weather performance to hidden track. The two smaller profile sills will be buried into the flooring either partially (shown above, center) or completely (shown above, right). These two options enhance the presentation but they offer no water or air resistance.



Locking Lever:

Each hinged locking section is equipped with a two-point lock that is engaged with a 180-degree turn.



Carrier Hardware:

Because Fleetwood is committed to the “little things” (see page 2), we insisted that only Centor hardware be used as the panel carriers. The engineering behind this hardware is obvious as soon as the panels are operated.