

## 90 DEGREE INSIDE CORNER: NAIL-FIN FRAMES

250-T, 510, 530-T, 2000 & 3800-T

U:\Cadfiles\_Admin\Products\Windows


CUSTOMER:	ORDER NO.:
SERIES:	ITEM NO.:

The following Plan View illustration demonstrates the Exterior Rough Opening line between the 2 corner legs on the 90 degree Corner Window.


Notice, that if you typically use 1/4" as a Shim space at the Jamb, you will now need to refer to the Chart below (based on Series) to add for additional Shim requirements. (This allows the window to be Installed from the Exterior, allowing the frame to rotate into the Opening at the Short Leg Nail-fin Point.

Note: Block frame windows can be Installed from the Interior and will not need the extra Shim.

**PLAN VIEW  
SERIES 3800-T SHOWN**

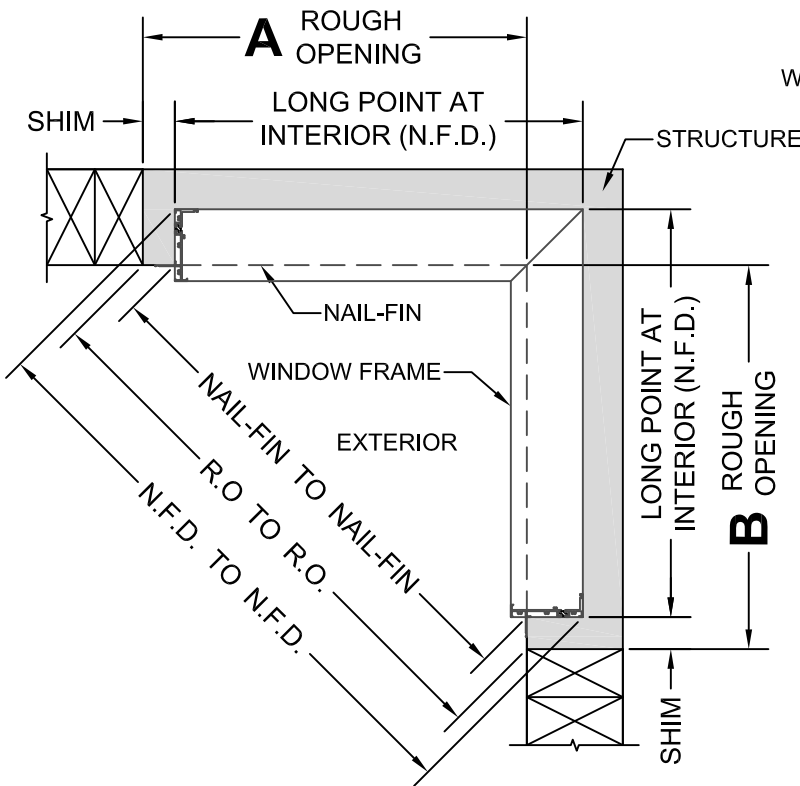

**ISOMETRIC VIEW  
90 DEGREE INSIDE CORNER**

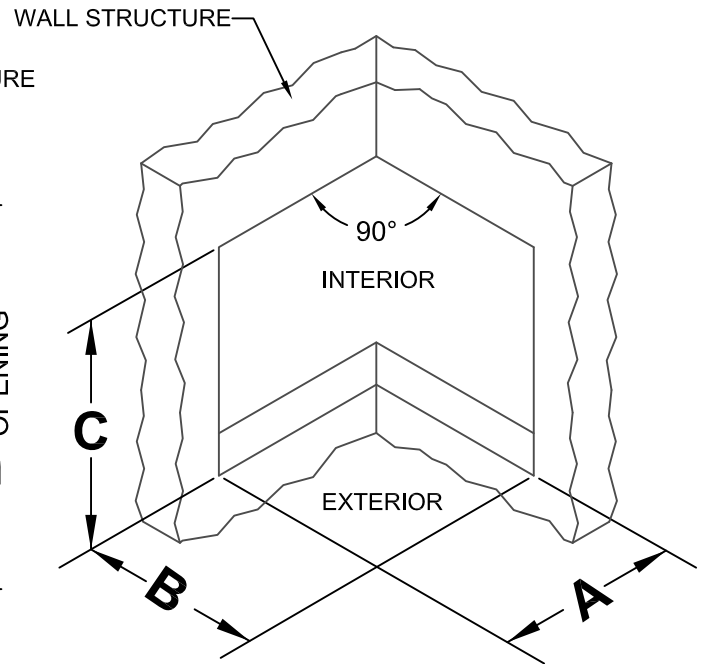

INSTRUCTIONS: ENTER THE (3) RO (ROUGH OPENING) DIMENSIONS IN THE TABLE AND CALCULATE REQUIRED N.F.D. BELOW. <b>ENTER BUILDING EXTERIOR DIMENSIONS ONLY!</b>					MINIMUM R.O. SHIM AND FRAME ADD			
DIM. REF.	CUSTOMER R.O.		*FRAME ADD			SERIES	REQ'D SHIM	*FRAME ADD
<b>A</b>		+	*	=		250-T	.875	.375
<b>B</b>		+	*	=		510	1.375	.75
<b>C</b>		-	.50	=		530-T	1.500	.875
						2000	.625	.125
						3800-T	2.00	1.50

CUSTOMER SIGNATURE:	DATE:
---------------------	-------